



**WHY OUR NEW
PATENTED IMPACT
WRENCH IS THE BEST
CHOICE**

POWERFUL
Industry's most compact high torque impact wrench delivering 2034 Nm of breakaway torque while weighing less than 1.99 kg and in a length under 187 mm

VERSATILE
Interchangeable drives can quickly configure this tool for the job without losing power, increasing size or needing more tools

DURABLE
More legendary durability from an unyielding titanium hammer case and a patented direct hammer lubrication system



**2236QTIMAX
IMPACT WRENCH**

DXS² Drive Xchange System™

INFORMES: 5558724528

INTERCHANGEABLE GAME-CHANGER


Ingersoll Rand® 2236 MAX Series 1/2" Impact Wrench



irttools.com/DXS

Introducing the Ingersoll Rand® 2236 MAX Series.

Versatility meets power in the new Ingersoll Rand 1/2" pneumatic impact wrench. The patented* Drive Xchange System™ lets you switch out anvils without clunky adapters that drain your tool's power.

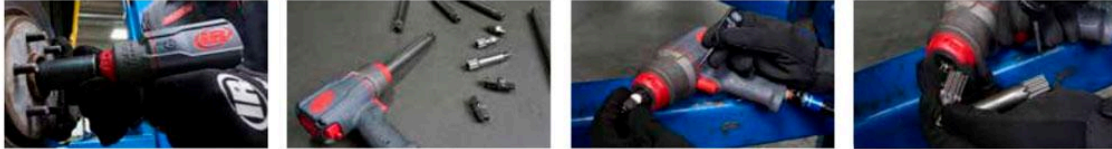

AVAILABLE CONFIGURATIONS



2236QTIMAX
Standard Friction Ring Anvil



2236OPTIMAX
Standard Pin Anvil



2236QTIMAX-2
2" Extended Friction Ring Anvil

Titanium Hammer Case
Lightweight with unyielding durability

274 Nm More Powerful
2034 Nm of Nut busting Torque
from a patented motor design**

Longer Life
Reliability from
a patented direct
greasing design

Quiet Tool
Technology
Protecting your
ears from free
speed noise

MAX Versatility
Patented DXS
Drive Xchange
System™



Interchangeable anvils
including:
3/8, 1/2, and 3/4 inch drive
options and five lengths
from 2 to 10 inches
(13 to 254 mm)

Compact size
Shorter than
previous 2235
for better access

Ergonomic
Handle Design
Reduced fatigue from
lower weight, better
balance

AVAILABLE
DRIVE SIZES

AK33H
3/8", 1/2", 3/4"

AK43H
3/4", 1/2 x 2"
1/2 x 4"



* Global Patents Pending
** Compared to IR 2235QTIMAX

| Model | Drive Size | Breakaway Torque Nm | Impact Per Minute (BPM) | MAX Free Speed (RPM) | Sound Level dB(A) | Weight kg | Length mm | Air Inlet (NPT/NPT) | Min Hose Size mm |
|--------------|-------------------------|---------------------|-------------------------|----------------------|-------------------|-----------|-----------|---------------------|------------------|
| 2236QTIMAX | 1/2" Standard Anvil | 2034 | 0 | 0 | 94.2 | 1.99 | 187 | | 10 |
| 2236QTIMAX-2 | 1/2 x 2" Extended Anvil | 2034 | 135 | 750 | 94.2 | 2.1 | 238 | 1/4 | 10 |
| 2236OPTIMAX | 1/2" Pin Anvil | 2034 | 135 | 750 | 94.2 | 1.99 | 187 | 1/4 | 10 |

| DRIVE KITS | Kit Description | Breakaway Torque Nm | Impact Per Minute (BPM) | MAX Free Speed (RPM) | Air Inlet (NPT/NPT) |
|------------|---|---------------------|-------------------------|----------------------|---------------------|
| AK32H | 2-pc Kit Includes: 3/8", 1/2" Std | 135 | 135 | 750 | 1/4 |
| AK33H | 3-pc Kit Includes: 3/8", 1/2" Std, 3/4" Std | 0 | 0 | 0 | 1/4 |
| AK42H | 2-pc Kit Includes: 1/2 x 2" Ext, 3/4" Std | 0 | 0 | 0 | 1/4 |
| AK43H | 3-pc Kit Includes: 1/2 x 2" Ext, 1/2 x 4" Ext, 3/4" Std | 0 | 0 | 0 | 1/4 |
| AK62H | 2-pc Kit Includes: 1/2" Std, 3/4" Std | 0 | 0 | 0 | 1/4 |
| EAK62H | 2-pc Kit Includes: 3/4" Std, 3/4 x 6" Ext | 0 | 0 | 0 | 1/4 |
| EAK44H | 4-pc Kit Includes: 1/2 x 4", 6", 8", 10" Ext | 0 | 0 | 0 | 1/4 |

